

Postal: PO Box 105, Upper Coomera, QLD 4209


**Phone:** 07 5538 3611

**Email:** sales@ledlightingaustralia.net.au **Web:** www.ledlightingaustralia.net.au

## LED LIGHTING AUSTRALIA-120W-LED STREET LIGHT Specification



**Product Size** 

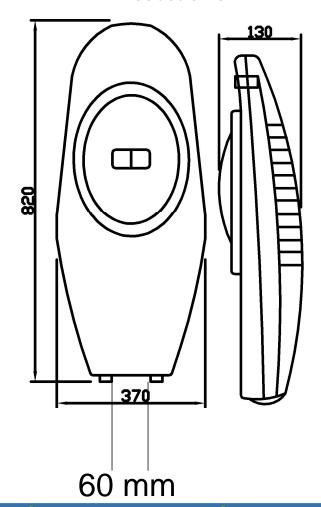

◆ LED DOWNLIGHTS
 ◆ LED TUBE LIGHTS
 ◆ LED BULBS
 ◆ LED PANEL LIGHTS
 ◆ LED HIGH BAYS



Postal: PO Box 105, Upper Coomera, QLD 4209

**Phone:** 07 5538 3611

**Email:** sales@ledlightingaustralia.net.au **Web:** www.ledlightingaustralia.net.au

## Application:

Main Road, Sidewalk, Square, School, Park, Garden, Factory, Residential Places, Villa and many other projector lighting places.

## Main Parameters:

- ☑ Input VoltageAC90-295V,47-63Hz
- ☑ LED QTY2 x (60 x 1W)
- ▼ Total Power 132W±2W
- Power Factor(PF:) > 0.95
- ✓ Driver Efficiency>91%
- ✓ LED Efficiency > 90 lm/w
- ✓ Initial LED Lumen > 10800 Im
- ✓ LED Work Voltage 30-34V
- ☑ Related color temperature(CCT)

  Cool White: 6000-7000K, Pure White: 4500 5500K, Warm White: 3000 4000K.
- ✓ IP Rating: IP65
- ✓ Working Temperature-40 °C ~ 50 °C
- ✓ Working Humidity -10 ~ 90%RH
- ✓ Storage Temperature -50 °C ~65 °C
- Material Die casting aluminum, Alluminium Reflector and toughened glass.
- ✓ LED Lifespan > 50,000 hours
- ✓ Pole diameter 60mm